# Reducing Global Warming Pollution from Mobile Air Conditioning

Roland J. Hwang


Senior Analyst
Air & Energy Program
Natural Resources Defense Council
rhwang@nrdc.org

CARB Technology Workshop Sacramento, CA April 20, 2004



## **EMISSIONS OF HFC-134a RISING**


#### **US Passenger Vehicle HFC-134a Emissions**

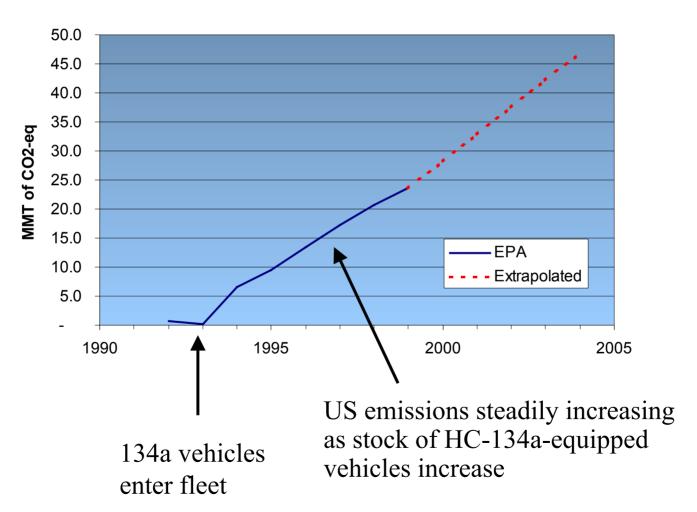



### IMPORTANCE OF AC EMISSIONS


- 8% of total global warming pollution emissions on a per vehicle basis
- Largest source of non-CO<sub>2</sub> emissions
- Largest source of accessory related CO<sub>2</sub> emissions

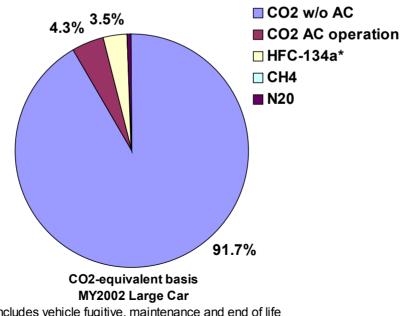





## SIMPLE SOLUTIONS AVAILABLE TO CONTROL AC SYSTEM LEAKAGE

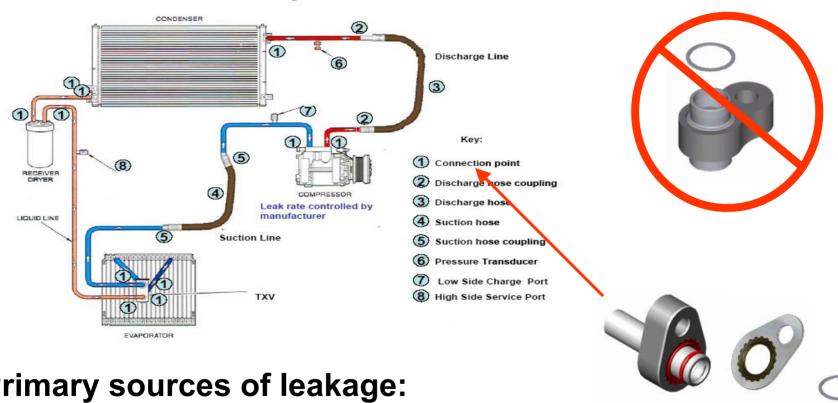

### **Primary sources of leakage:**

- Compressor seals
- Connections x 10
- Hoses x 8





## DIRECT 134a EMISSIONS: METHODOLOGY

- Lifecycle emissions ("cradle to grave")
  - Manufacturing
  - Vehicle leakage
  - Servicing (not including DIY'ers)
  - End of life
- Emission factors
  - From previously published estimates, especially Europe
  - Adapted for larger US charge size
- Range of emission scenarios
  - Low, Mid, High
- Spreadsheet Model
  - Predicts recharge and recovery



## MANUFACTURING, SERVICING, AND END OF LIFE

- Manufacturing
  - Small amount lost during filling of system, 1 to 5%
  - This study: 1, 2 and 6%
- Servicing
  - Recharge at 60% of original charge (60%)
  - Low: 6% of remaining charge = 55 g
  - Mid and High: 100 g
  - Results in 2-3 recharges over vehicle life
- End of life recovery
  - Unclear how much recovered due to low value
  - Assume 0, 25 and 50% recovery



### **VEHICLE LEAKAGE**

- Regular
  - Specifications appear to be around 25 to 40 g/yr but real-world should be higher
  - One European study found an average leak rate of 7.7% for US size charges (=70 g/yr)
  - This study: 50 to 70 g/yr
- Irregular (accidental releases)
  - European study estimated at 1.9% of initial charge (=17 g/yr for US-size charge)




## **SUMMARY KEY ASSUMPTIONS**

Key Assumptions			
	Low	Mid	High
original charge, grams	910	910	910
Capacity Heels, % loss of orig charge	1%	2%	6%
Fugitive regular, g/yr	50	70	70
Accidental (irregular)	17	17	17
charge at refill, %	60%	60%	60%
charge at refill, g	546	546	546
Servicing emissions, g	54.6	100	100
One time servicing emissions	0	0	0
end of life recovery	50%	25%	0%



## RESULTS LIFETIME DIRECT EMISSIONS

### CARB estimate = 85 g/yr

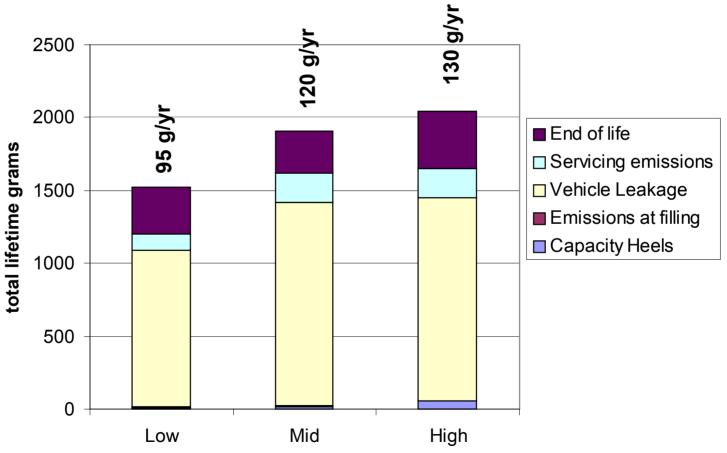


Assumes 16-year life, 200,000 miles



## RESULTS CO<sub>2</sub> EQUIVALENT BASIS

12 g/mile total emissions vs CARB estimate of 8.5 g/mile

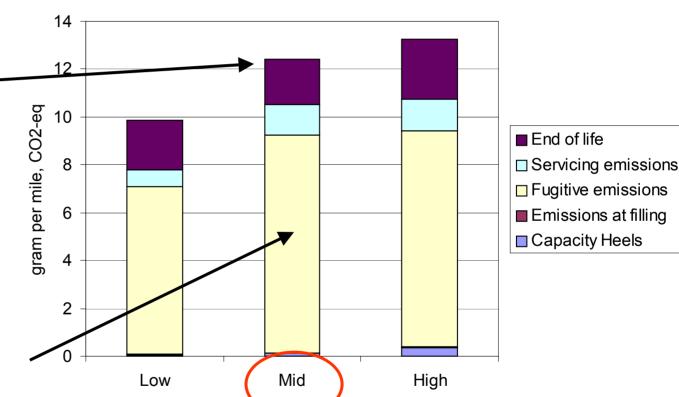


9 g/mile vehicle leakage vs CARB estimate of 6 g/mile

Assumes 16-year life, 200,000 miles



## AC CONTROL OPTIONS CAN REDUCE TOTAL EMISSIONS BY ABOUT 5%

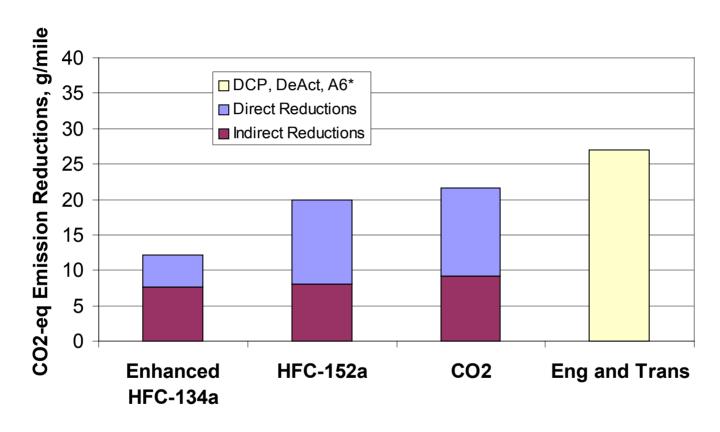


Assumes MY 2002 large car, 200K mile, 16-year life and \$1.74/gallon

Based on NRDC estimates for direct (mid), CARB and NESCCAF data on indirect and for control cost and effectiveness

\* DCP (dual cam phasing), DeAct (cylinder deactivation), A6 (automatic 6-speed transmission)



## AC EMISSION CONTROLS ARE LOW COST COMPLIANCE OPTIONS

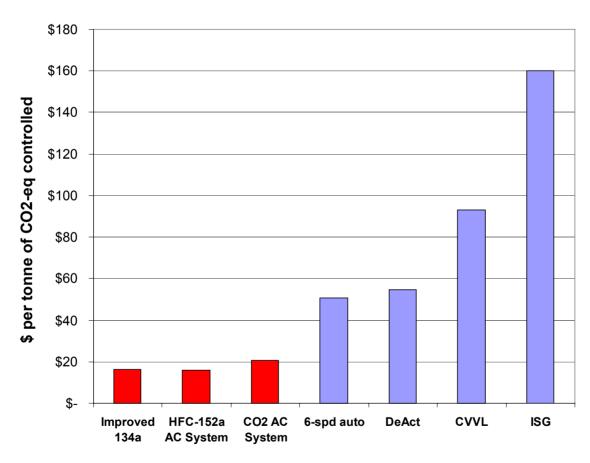


#### **TECHNOLOGY DESCRIPTIONS:**

- 6-spd auto: 6-speed automatic transmission
- DeAct: Cylinder Deactivation
- CVVL: Continuous Variable Valve Lift
- ISG: 42V Integrated Starter Generator



## AC REDUCTIONS ARE EXTREMELY COST-EFFECTIVE

- Incremental cost of \$40 to \$83 (NESCCAF 2004)
- Lifetime operating cost savings for fuel = \$300-375 (undisc)
- Enhanced 134a and 152a reduces one servicing = \$100
- Simple payback time of 2 to 4 years

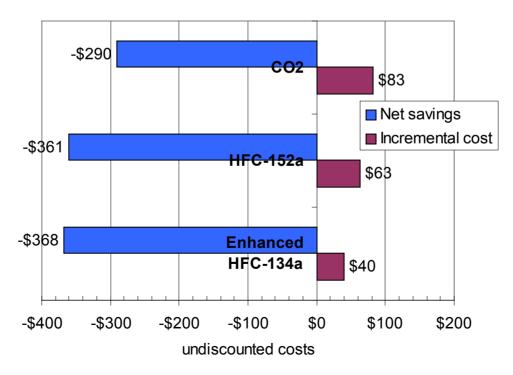



Assumes MY 2002 large car, 200K mile, 16-year life and \$1.74/gallon NRDC calculations based on CARB and NESCCAF data

## STATUS OF ENHANCED HFC-134a SYSTEMS

- Introduction in MY2006 timeframe possible since technology is well known
- Low leak components being developed by industry already to meet upcoming European regulations
- Variable displacement compressors already widespread in Europe
- New government/industry partnership announced at 2004 MAC Summit with goal of production vehicles by MY2006



## **COMMENTS ON CARB ANALYSIS**

## Comparison

- CARB direct emission estimates roughly consistent with NRDC "low" scenario
- NRDC "mid" estimate is roughly 50% higher (8.5 vs 12 g/mile of CO2-eq)

### Differences

- Initial charge, 950 g (CARB) vs. 910 g (MACS)
- Higher vehicle leakage (70 g/yr)
- Maintenance accidental releases, included in CARB 950g initial charge?
- Percent charge at refill, 52% (CARB) vs. 60%
   (MACS), results in two charges per life, versus one charge in CARB analysis



## **COMMENTS CARB ANALYSIS**


- Industry plans for servicing after 4 years (2-3 services over life), with longer term goal of 7 years (1 service over life)
- Low leak HFC-134a systems can eliminate one servicing
  - Reduces emissions by 50-100 gram over vehicle life
  - Additional \$100 savings in servicing cost to consumers



## **REAL WORLD EMISSIONS GAP**

#### How much is attributable to small cans?

Significant portion of 31 mill lb discrepancy between '98 service fleet R134a requirements and EPA R134a emissions

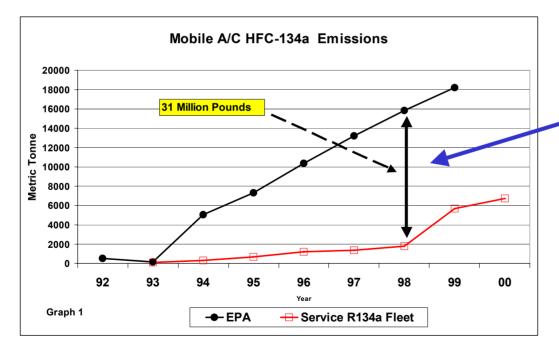

Source: US EPA

?





### **COMMENTS ON CARB ANALYSIS**

- Real world HFC-134a emissions "gap"
  - Well known emissions "gap" in EPA's top down and bottom-up inventory
  - Partially due to "do-it-yourselfers" with disposable cans and other uses, but gap is too large to be fully explained by these sources
- Implications
  - HFC-134a needs better "cradle-to-grave" controls which is outside the scope of AB1493
  - Alternative low-GWP refrigerants likely to have larger real-world benefit than estimated in CARB's analysis



### **CONCLUSIONS**

- HFC-134a emissions are rapidly rising and are the largest source of non-CO<sub>2</sub> global warming pollution emissions from passenger vehicles
- Control technologies are rapidly being developed to meet forthcoming EC regulations
- Enhanced 134a are likely to be available by MY2006 and are a low cost global warming control option for manufacturers
- Control options save consumers money with simple payback time as low as 2 years



## **CONCLUSIONS** (cont.)

- CARB's assessment of direct and indirect emissions reductions is technically sound and a substantial contribution to our understanding of these emissions
- CARB's direct emission assessment is conservative, which will tend to underestimate the emission reductions and cost-effectiveness of control options



## MAC Industry: Part of the Solution or Part of the Problem?

#### JIM BORGMAN



